


## NEW PAINT LIFT – UP5A



### Technical informations:

Oleodynamic lifts with extra front apron, load capacity 200 kg with three movements: longitudinal (right/left), vertical (up/down), transversal (forwards/backwards).

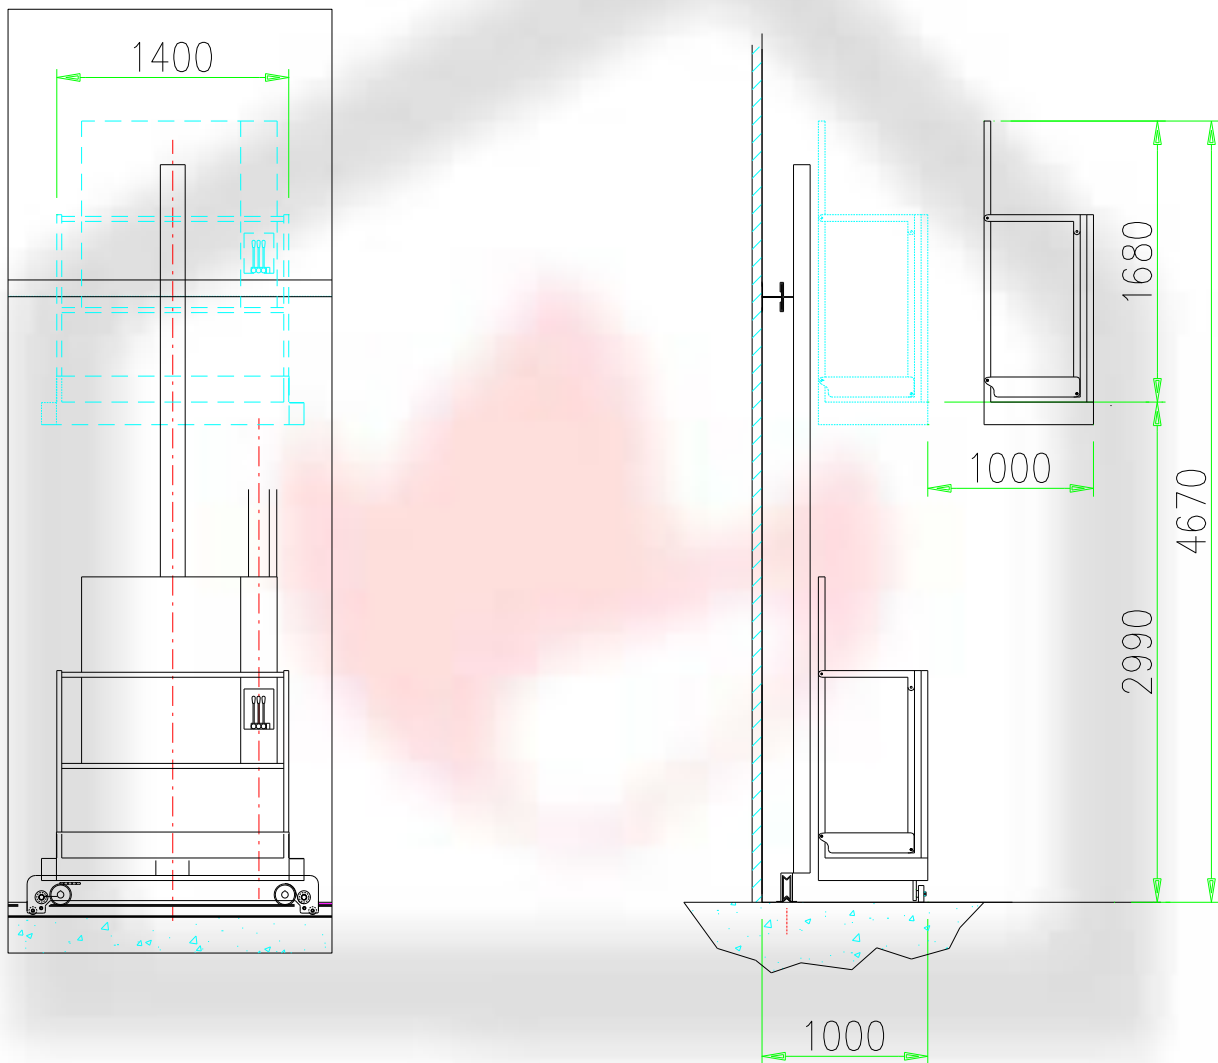

Portata>Loading capacity/Capacité de charge	200 kg
Dispositivo di sollevamento/Lifting device/Dispositif de levage	idraulico/ hydraulic/hydraulique
Dispositivi ausiliari di bordo/Additional control devices/Dispositifs additionnels	pneumatici/air operated/pneumatiques
Dimensioni cestello/Cage dimensions/Dimension de cage	L=1400 mm
Corsa longitudinale/Longitudinal stroke/Course longitudinale	adattabile alla cabina/adjustable to the cabin/adaptable à la cabine
Corsa uscita cestello/Cage exit stroke/Course sortie cage	1000 mm
Altezza di sollevamento da terra/Lifting height from ground/Hauteur de levage du sol	2990 mm
Alimentazione elettrica std/Control unit power/Alimentation électrique standard	400V / 50 Hz / 3 ph + terra
Potenza motore/Motor power/Puissance moteur	1,5 kw / 3 ph / 400 v
Tempo di salita/Lifting time/Temps de levage	30 sec.
Tempo discesa/Lowering time/Temps de descente	25 sec.
Temperatura massima di esercizio/Max. working temperature/Température maxi. en service	90° C / 10 '
Direttiva Atex 94/9/CE/Atex 94/9/CE standards/Directive Atex 94/9/CE	marcatura categoria II 2 GD c IIB T6 T85°C/class II 2 GD c IIB T6 T85°C/marquage classe II 2 GD c IIB T6 T85°C

